


2mJ 1535nm Erbium Glass Lasers

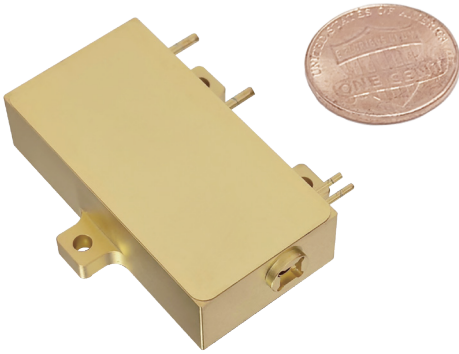

RealLight' s 1535nm Erbium glass lasers operate in the eyesafe wavelength regime, have great advantages in applications including laser ranging and LiDAR. This series of lasers feature no tail pulse, stable pulse energy and excellent beam profile. The integrated design of diode-pumped module and laser crystal brings convenience to installation and integration due to the compact size. The output power of this series is up to 2mJ.

Technical Specifications

Wavelength (nm)	1535
Single pulse energy (mJ)	2
Repetition rate (Hz)	5
Pulse width (typ., ns)	11
Pump pulse width (typ., ms)	2.5
Energy Stability (RMS)	3%
Beam diameter (mm)	0.6
Beam full divergence (typ., mrad)	5
Beam profile	TEM ₀₀
PIN amplitude (typ., V@50Ω resistance)	2
Operating current (typ., A)	70
Operating Voltage (V)	4
Dimensions (L×W×H,mm)	48x25x12
Weight (g)	100
Operation temperature (°C)	-40~65
Storage temperature (°C)	-45~80
PD output signal	built-in photodiode


All the data in the above table are the typical values obtained from the tests at room temperature of 25 °C , and the final data is subject to the final test report.

Applications


Laser rangefinder
Meteorological radar

Key Features

- ◆ Passively Q-Switched, Er: Glass
- ◆ Eye-safe
- ◆ Extremely light
- ◆ Super compact design
- ◆ Wide operating temperature range

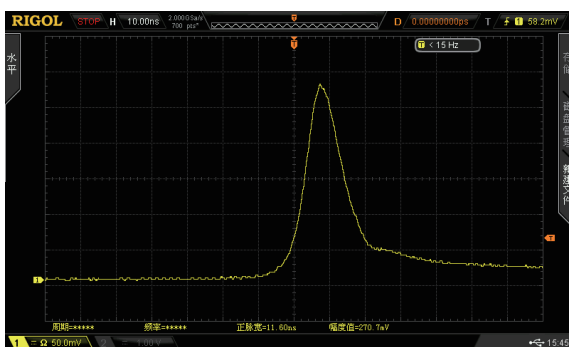

Typical Pulse

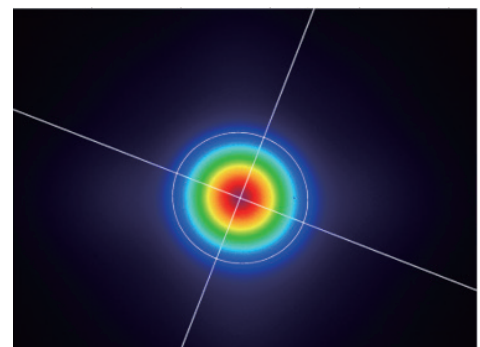


Beam Profile


Order Information

Wavelength (nm)	Part Number	Repetition rate (Hz)	Pulse width (ns)	Single pulse energy (μJ)	Dimensions (mm)
1535	R1535-0.005-11-2000-F11B	5	11	2000	48x25x12

Part Numbering Schema

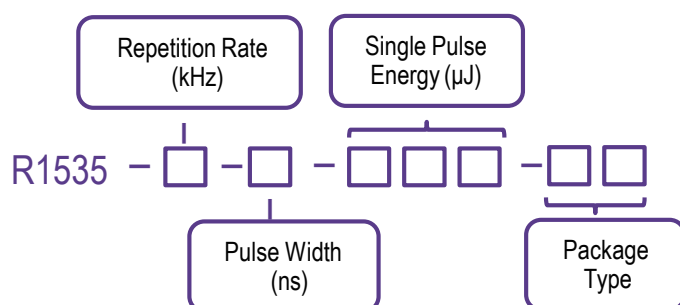

Mechanical Drawings (in mm)

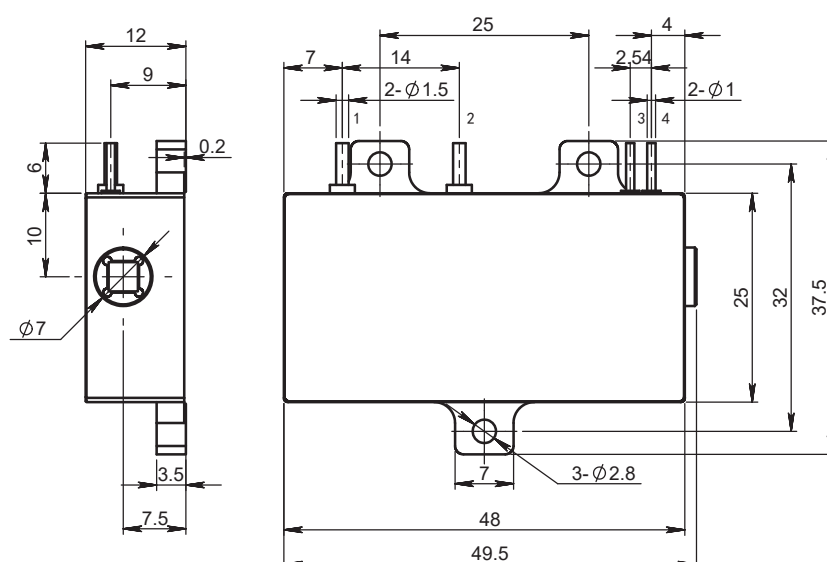

F11B Drawing

