

# HQF Series Lamp-pumped Picosecond MOPA Laser

# Key Features

- Single pulse energy up to 500mJ
- Peak power up to 1.5GW
- Repetition rate up to 10Hz
- Excellent beam homogeneity
- Great stability
- Compact design, sealed package,

high reliability

#### **Applications**

Laser ranging Aesthetic medicine

Differential absorption lidar

Particle image velocimetry (PIV)

Laser shock processing (LSP)

Laser-induced breakdown spectroscopy (LIBS)

Laser-based ultrasound detection


Laser-induced fluorescence (LIF)

Tissue ablation

Non-linear optics



Beam profile of the amplified pulse



Typical pulsewidth

## **Technical Specifications**

| Part Number              |                              | HQF-1064/532-10-350-500/300-P     | HQF-1064/532-10-350-350/200-P |  |  |  |  |
|--------------------------|------------------------------|-----------------------------------|-------------------------------|--|--|--|--|
| Repetition rate (Hz)     |                              | 1~10                              | 1~10                          |  |  |  |  |
| Pulse energy (mJ)        |                              |                                   |                               |  |  |  |  |
| 1064nm                   |                              | 500                               | 350                           |  |  |  |  |
| 532nm                    |                              | 300                               | 200                           |  |  |  |  |
| Energy stability RMS     |                              |                                   |                               |  |  |  |  |
| 1064nm                   |                              | <2%                               | <3%                           |  |  |  |  |
| 532nm                    |                              | <3%                               | <4%                           |  |  |  |  |
| Power drift <sup>1</sup> |                              |                                   |                               |  |  |  |  |
| 1064nm                   |                              | <2%                               |                               |  |  |  |  |
| 532nm                    |                              | <3%                               |                               |  |  |  |  |
| Other parameters         |                              |                                   |                               |  |  |  |  |
| Pulse width FWHM (ps)    |                              | 350                               |                               |  |  |  |  |
| Beam full divergence     | Horizontal @1/e <sup>2</sup> | <3                                |                               |  |  |  |  |
| (typ., mrad)             | Vertical @1/e²               | <3                                |                               |  |  |  |  |
| Beam diameter (mm)       |                              | ~11                               |                               |  |  |  |  |
| Spatial profile          |                              | Top hat                           |                               |  |  |  |  |
| Polarization direction   |                              | Vertical                          |                               |  |  |  |  |
| Electrical supply        |                              | 220VAC±5% 50~60Hz                 |                               |  |  |  |  |
| Power consumption        |                              | <1kW(500mJ@10Hz)                  |                               |  |  |  |  |
| Environment requirements |                              | temperature 18~35°C,humidity <75% |                               |  |  |  |  |

- 1. Average energy variation is measured at room temperature with fluctuations less than 3°C within 8 hours.
- 2. As products are constantly being updated, the right of final interpretation of technical specifications or illustrations in datasheet belongs to RealLight.
- 3. All the data in the above table are the typical values obtained from the tests at room temperature of 25°C, and the final data is subject to the final test report.







#### **Order Information**

| Wavelength (nm) | Part Number                   | Repetition Rate (Hz) | Pulse Width (ps) | Single Pulse Energy (mJ) |
|-----------------|-------------------------------|----------------------|------------------|--------------------------|
| 1064/532        | HQF-1064/532-10-350-500/300-P | 1~10                 | 350              | 500@1064<br>300@532      |
|                 | HQF-1064/532-10-350-350/200-P | 1~10                 | 350              | 350@1064<br>200@532      |

### Part Numbering Schema

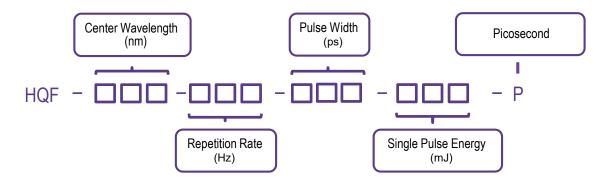

## Mechanical Drawings (in mm)

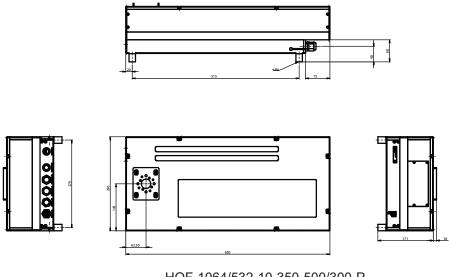

HQF-1064/532-10-350-500/300-P

