



WV10 808nm-600W

Macro Channel Diode Laser Array

Key Features

- ◆ Fast axis collimation optional
- ◆ 100W single bar
- ◆ AuSn soldering
- ◆ Macro channel water cooling
- ◆ High power density
- ◆ High efficiency
- ◆ High reliability and stability
- ◆ Multi-wavelength operation:
755/808/940/1064nm

Applications


- Hair removal
- Skin rejuvenation
- Material processing
- Laser illumination

Technical Specifications


Optical Parameters	
Part Number	R808±15-Q600-WV10-10x6-001
Center Wavelength λ_c (nm)	808
Wavelength Tolerance $\delta\lambda_c$ (nm)	±15
Output Power (W)	600
Number of Bars	6
Bar-to-Bar Pitch (mm)	2.18
Spot Size (mm)	10 X10.9
Fast Axis Full Divergence Angle (FWHM) (°)	78 (or customized angle)
Slow Axis Full Divergence Angle (FWHM) (°)	20
Wavelength Temperature Coefficient (nm/°C)	~ 0.3
Electrical Parameters	
Operating Current I_{op} (A)	≤100
Threshold Current I_{th} (A)	≤20
Operating Voltage V_{op} (V)	≤12
Duty Cycle (max., %)	30
Pulse Width (max., ms) ¹	200
Repetition Rate (Hz)	1 ~ 10
Cooling Parameters	
Cooling Water Requirements	Deionized Water or Distilled Water
Water Temperature (°C) ²	20 ~ 30
Water Pressure (Mpa)	0.25 ~ 0.35
Water Flow Rate (L/min) ³	2.5 ~ 3.5

1. Since the duty cycle of the module cannot exceed 30% during operation, when the maximum pulse width is 200ms, the repetition frequency can only be 1Hz; when the maximum repetition frequency is 10Hz, the maximum pulse width is 20ms only.
2. Avoid laser operation in condensing environments, ensure ambient temperature exceeds minimum safe operating limits.
3. The water flow rate refers to the flow of cooling water exiting the laser system.
4. Custom wavelengths available upon request.
5. All the data in the above table are the typical values obtained from the tests at room temperature of 25°C, and the final data is subject to the final test report.

Part Numbering Schema

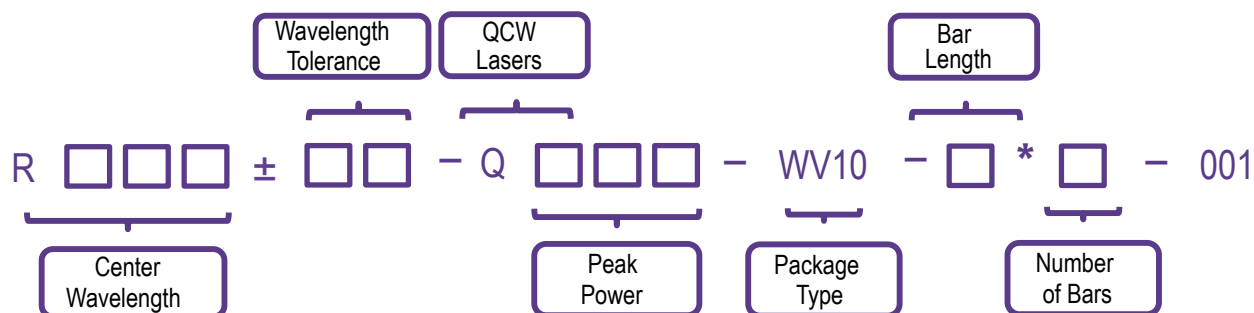

Mechanical Drawings (in mm)

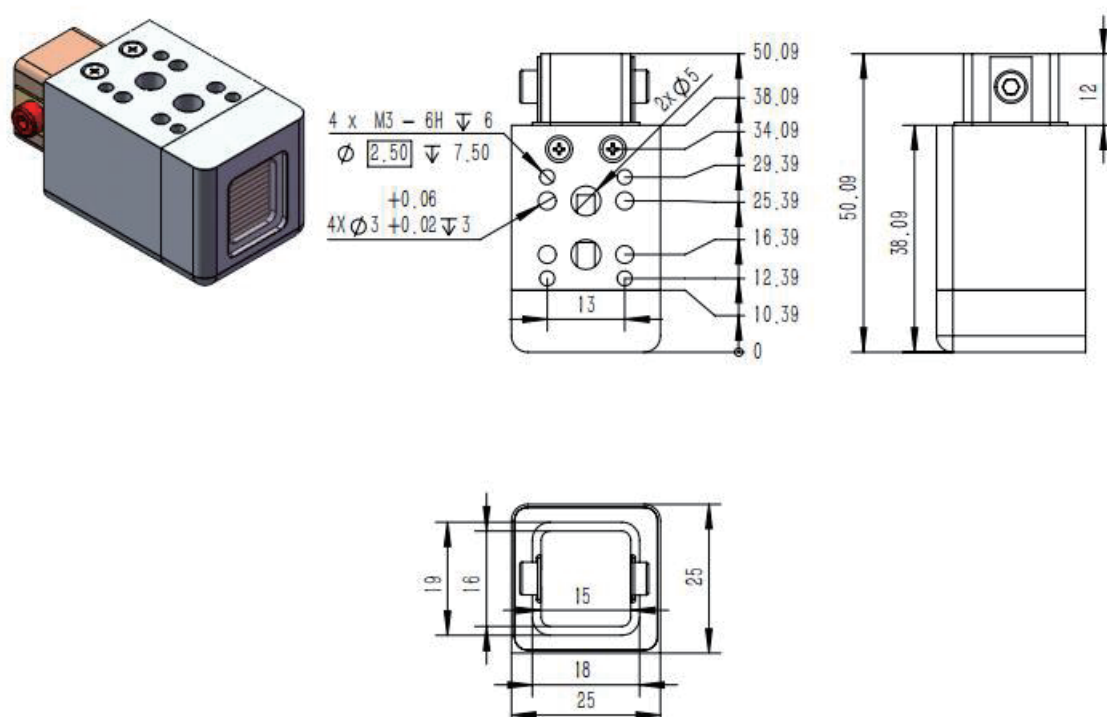

Notes:

The light-emitting area dimensions in the diagram are for illustrative purposes only. Refer to specs for actual measurements.

Laser Operating Conditions Reference

Operating Condition		Frequency (Hz)										Operating Current
		1	2	3	4	5	6	7	8	9	10	
Pulse Width (ms)	10	100A	100A	100A	100A	100A	100A	100A	100A	100A	100A	≤100A
	20	100A	100A	100A	100A	100A	100A	100A	100A	100A	100A	
	30	100A	95A	95A	95A	95A	95A	95A	95A	95A	95A	
	40	95A	95A	95A	95A	95A						
	80	90A	90A	90A								
	100	90A	90A									
	200	90A										

