


100~300μJ 1535nm Erbium Glass Lasers

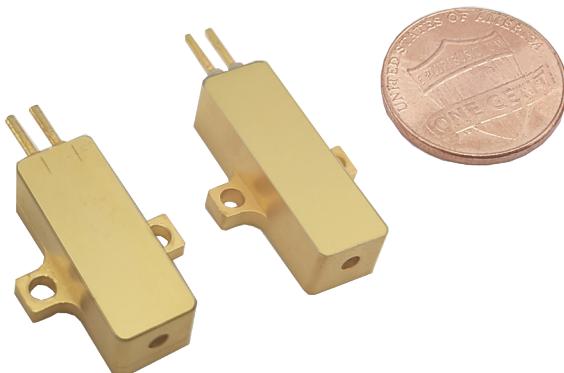


RealLight's 1535nm Erbium glass lasers operate in the eyesafe wavelength regime, have great advantages in applications including laser ranging and LiDAR. This series of lasers feature no tail pulse, stable pulse energy and excellent beam profile. The integrated design of diode-pumped module and laser crystal brings convenience to installation and integration due to the compact size.


Technical Specifications

Wavelength (nm)	1535				
Pulse energy (μJ)	100	200	300		
Repetition rate (Hz)	10				
Pulse width (typ., ns)	3	4	4		
Energy Stability (RMS)	3%				
Beam full divergence (mrad)	≤11	≤10	≤9		
Beam profile	TEM ₀₀				
Operating current (A)	8	8	12		
Operating Voltage (V)	2				
Dimensions (L×W×H,mm)	21x8x7	25x8x7			
Weight (g)	8	10			
Operation temperature (°C)	-40~65				
Storage temperature (°C)	-45~80				

All the data in the above table are the typical values obtained from the tests at room temperature of 25°C, and the final data is subject to the final test report.

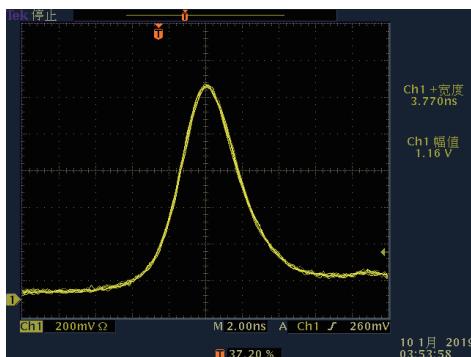

Typical Pulse

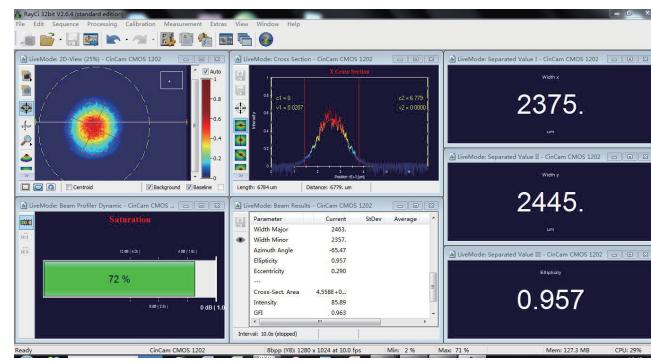

Beam Profile

Applications

Laser rangefinder
Meteorological radar


Key Features

- ◆ Passively Q-Switched, Erbium Glass
- ◆ Eye-safe
- ◆ Extremely light
- ◆ Super compact design
- ◆ Wide operating temperature range





Order Information

Wavelength (nm)	Part Number	Repetition rate (Hz)	Pulse width (ns)	Pulse energy (μJ)	Dimensions (mm)
1535	R1535-0.01-3-100-F1A	10	3	100	21x8x7
	R1535-0.01-4-200-F1A	10	4	200	21x8x7
	R1535-0.01-4-300-F2A	10	4	300	25x8x7

Part Numbering Schema

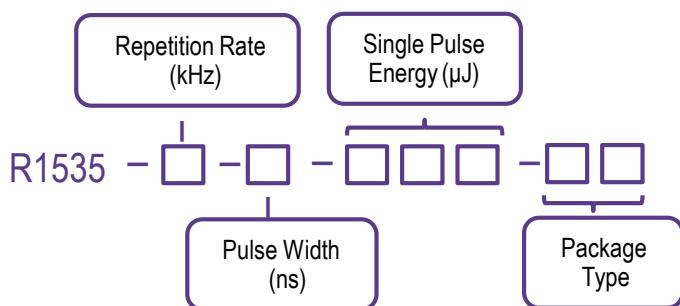

Mechanical Drawings (in mm)

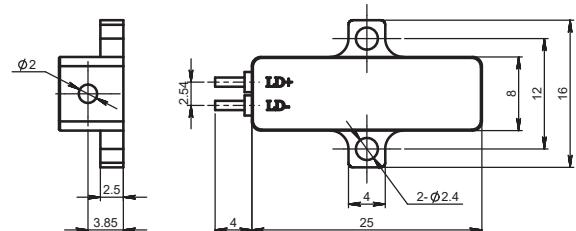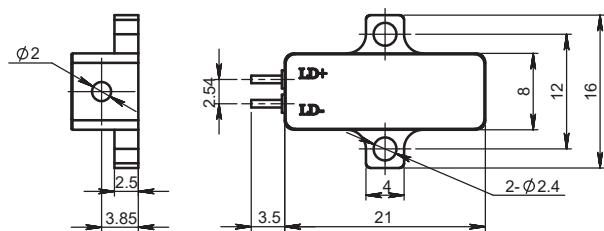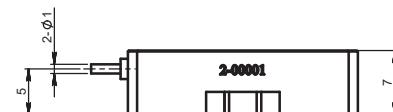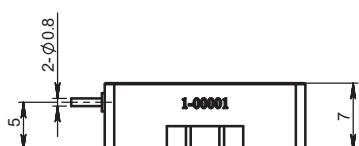

F1A Drawing

F2A Drawing

