

MCA-R Series

2ns Microchip Laser



MCA series microchip lasers are RealLight's self-developed, passively Q-switched diode-pumped solid-state lasers. The integrated design of diode-pumped module and laser crystal brings convenience to installation and integration due to the compact size. This series of lasers offers miniaturized drive boards specially for meteorological radar application, featuring small size, low power consumption, and can be used in high altitude, large temperature difference and other harsh environment. Custom dual wavelength laser solutions are available for MCA series, such as 1064nm&532nm, 1064nm&355nm or others.

Key Features

- ◆ Pulse width down to 2ns
- ◆ Single pulse energy up to 180μJ
- ◆ Repetition rate up to 2.5kHz
- ◆ Spatial mode TEM₀₀
- ◆ Sealed package, high reliability


Applications

- LIDAR
- Laser ranging
- Atmospheric monitoring


Technical Specifications

Optical Parameters				
Wavelength (nm)		1064		532
Repetition rate (kHz)		2.5*		
Average power (mW)		275	450	138 225
Pulse energy (μJ)		110	180	55 90
Pulse width (ps)		2000	2500	2000 2500
Power stability (RMS, @8h)		<3%		
Beam profile		TEM ₀₀		
Beam full divergence (typ., mrad)	Horizontal @1/e ²	≤3		≤2.5
	Vertical @1/e ²	≤3		≤2.5
Polarization ratio		>100:1		
System Parameters				
Supply power voltage		12V DC		
Control interface		RS232, USB		
Power consumption (W)		≤45		
Power dimensions (W×H×L,mm)		86×30.5×101		
Laser head dimensions (W×H×L,mm)		45×33×120		
Operation temperature (°C)		15~35		
Storage temperature (°C)		0~60		

1. *Side laser outlet configuration.
2. External beam expanders are available upon request, to meet smaller divergence requirements.
3. All the data in the above table are the typical values obtained from the tests at room temperature of 25°C, and the final data is subject to the final test report.

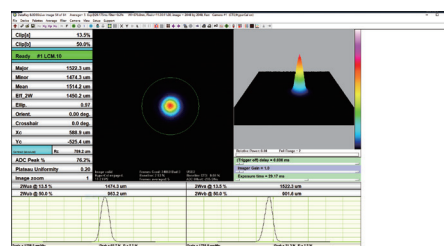

Beam Profile (532nm)




Typical Pluse


Order Information

Wavelength (nm)	Part Number	Repetition rate (kHz)	Pulse energy (μJ)
1064	MCA-1064-2.5-110	2.5	110
	MCA-1064-2.5-180	2.5	180
532	MCA-532-2.5-55	2.5	55
	MCA-532-2.5-90	2.5	90



Part Numbering Schema

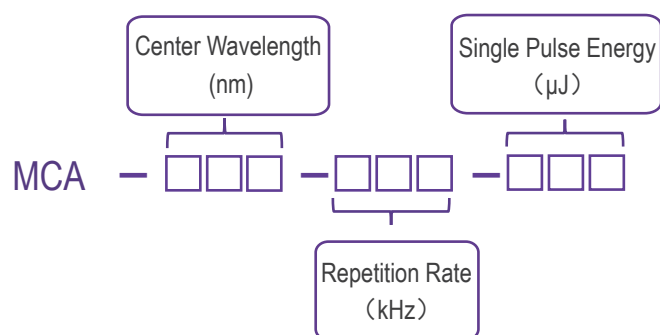

Mechanical Drawings (in mm)

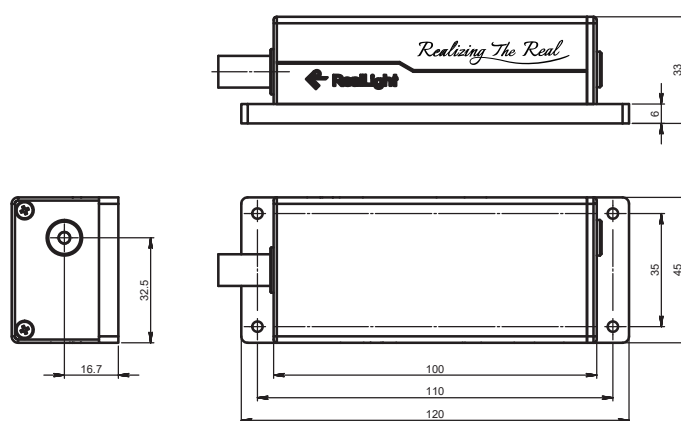

Laser Head (side laser outlet)

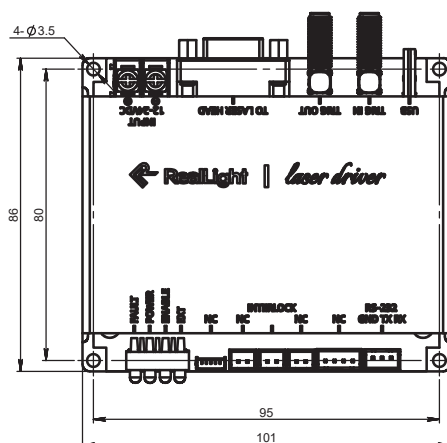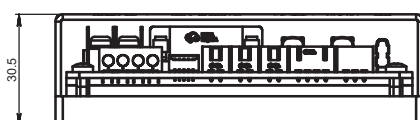

Laser Drive Board

