

NLM Series Dual-wavelength Narrow Linewidth Laser



Key Features

- ◆ Linewidth < 0.1nm for each wavelength
- ◆ Excellent wavelength stability $\pm 7\text{pm}@4\text{h}$
- ◆ Constant frequency interval, support difference algorithm
- ◆ Built-in TEC, power stability $\pm 2\%$
- ◆ Contains PC control, emergency stop button functions


Applications

Raman spectroscopy Bio-instrumentation


Technical Specifications

Optical Parameters		
Center Wavelength (nm)	784/785	785/1064
Output Power (mW)	500/500	500/800
Wavelength Tolerance (nm)	±0.5 (each wavelength)	
Linewidth (nm)	<0.1 (each wavelength)	
Wavelength Stability (typ., @4h)	±7 pm	
Power Stability (typ., @4h)	±2%(P-P)	
SMSR	40dB	
System Parameters		
Adjustbility % Full Power	0~100%	
Warm up Time (min)	15	
Modulation Input	Analog signal 0~5V	
Control Interface	USB, SMA	
Connector	SMA905, FC/PC	
Output Fiber	105 μm, 0.22 NA	
Supply Voltage	+12VDC	
Power Consumption (typ., W)	<20	
Storage Humidity	0~70% RH	
Storage Temperature (°C)	-25~55	
Operating Temperature (°C)	10~35	
Weight (kg)	1.2	
Dimensions (mm)	180×102×180.2	

All the data in the above table are the typical values obtained from the tests at room temperature of 25°C , and the final data is subject to the final test report.

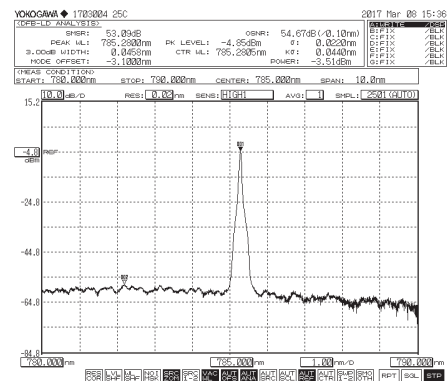

785nm laser spectrum (SMSR>40dB)

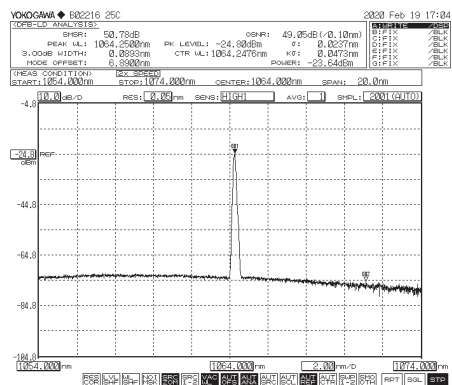


1064nm laser spectrum (SMSR>40dB)

Ordering Information

Wavelength (nm)	Output Power (mW)	Part Number	Connector
784/785	500/500	NLM-784/785-IF(S)-500/500	SMA905
	500/500	NLM-784/785-IF(F)-500/500	FC/PC
785/1064	500/800	NLM-785/1064-IF(S)-500/800	SMA905
	500/800	NLM-785/1064-IF(F)-500/800	FC/PC

Part Numbering Schema

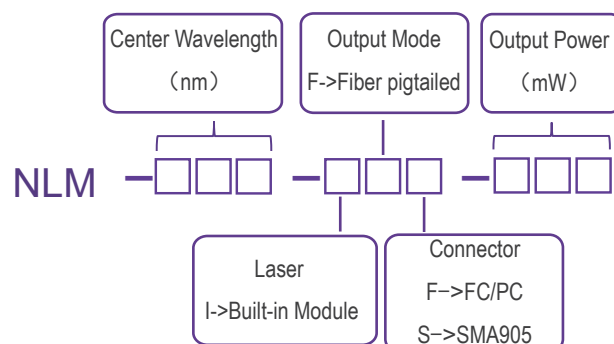

Mechanical Drawings (mm)

