


T02 Series Eye-safe Laser Transmitter

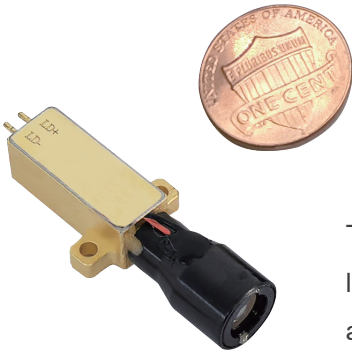

The T02 series is an integrated laser transmitter consisting of a diode-pumped passively Q-switched Erbium glass laser independently developed by RealLight, a transmitting antenna, and a photodiode. The laser module operates at the eye-safe wavelength of 1535nm and can synchronize the laser pulse signal. The transmitter has the characteristics of small size, small divergence angle, and wide temperature range operation. It is professionally used in LIDAR, laser range finding, laser remote sensing and other fields.

Key Features

- ◆ Eye-safe laser wavelength
- ◆ Integrated photodiode
- ◆ Small divergence angle
- ◆ Super compact design
- ◆ High reliability

Technical Specifications

Wavelength (nm)	1535	
Pulse energy of the laser (μJ)	100	200
Transmitter transmittance	>90%	
Repetition rate (Hz)	10	
Pulse width (typ., ns)	5	
Energy Stability (RMS)	3%	
Beam diameter (typ., mm)	5	
Beam full divergence (mrad)	<0.8	
Beam profile	TEM ₀₀	
PIN amplitude (typ., V@50Ω resistance)	3	
Operating current (A)	8	
Operating Voltage (V)	2	
Weight (g)	11	
Operation temperature (°C)	-40~65	
Storage temperature (°C)	-45~80	

All the data in the above table are the typical values obtained from the tests at room temperature of 25°C, and the final data is subject to the final test report.

Order Information

Wavelength (nm)	Part Number	Repetition rate (Hz)	Pulse width (ns)	Pulse energy of the laser (μJ)	Beam full divergence(mrad)
1535	R1535-0.01-5-100-T02	10	5	100	<0.8
	R1535-0.01-5-200-T02	10	5	200	<0.8

Applications

Laser range finding
Remote sensing
LiDAR

Mechanical Drawings (in mm)

